



FEATURES

- You can use the camera by a DC 12V / 200mA
- The camera utilizes a CCD image sensor having a high quality picture.
- The camera automatically adjusts the picture quality with changing in light.
- Water-resistant housing.
- Operates over a wide temperature range.

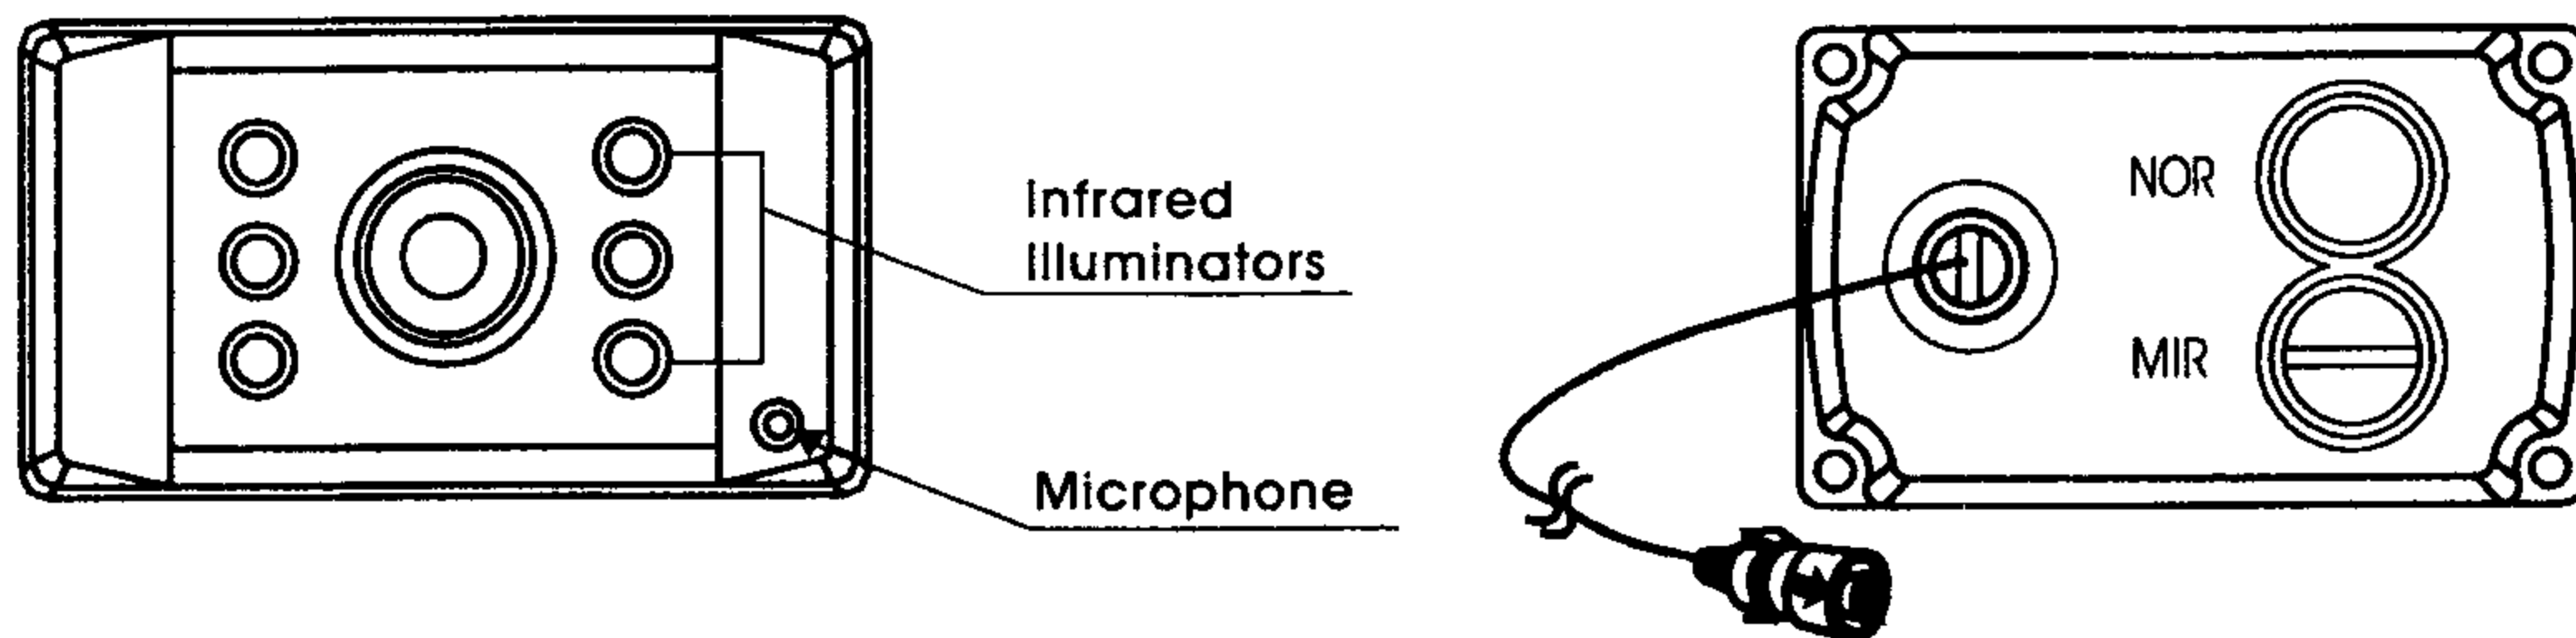


Camera input connector pin description.

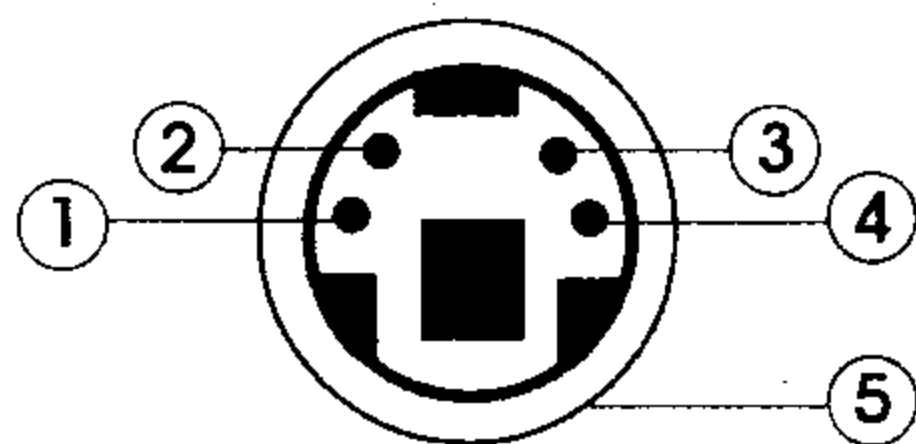


Pin No.	Description
1	Video Output
2	Nor / Mir
3	Audio Output
4	Power DC 12V
5	Ground

CAMERA INSTALLATION

- A. Attach the supplied mounting bracket to the vehicle. Adjust the angle of the camera and fasten the screws firmly.

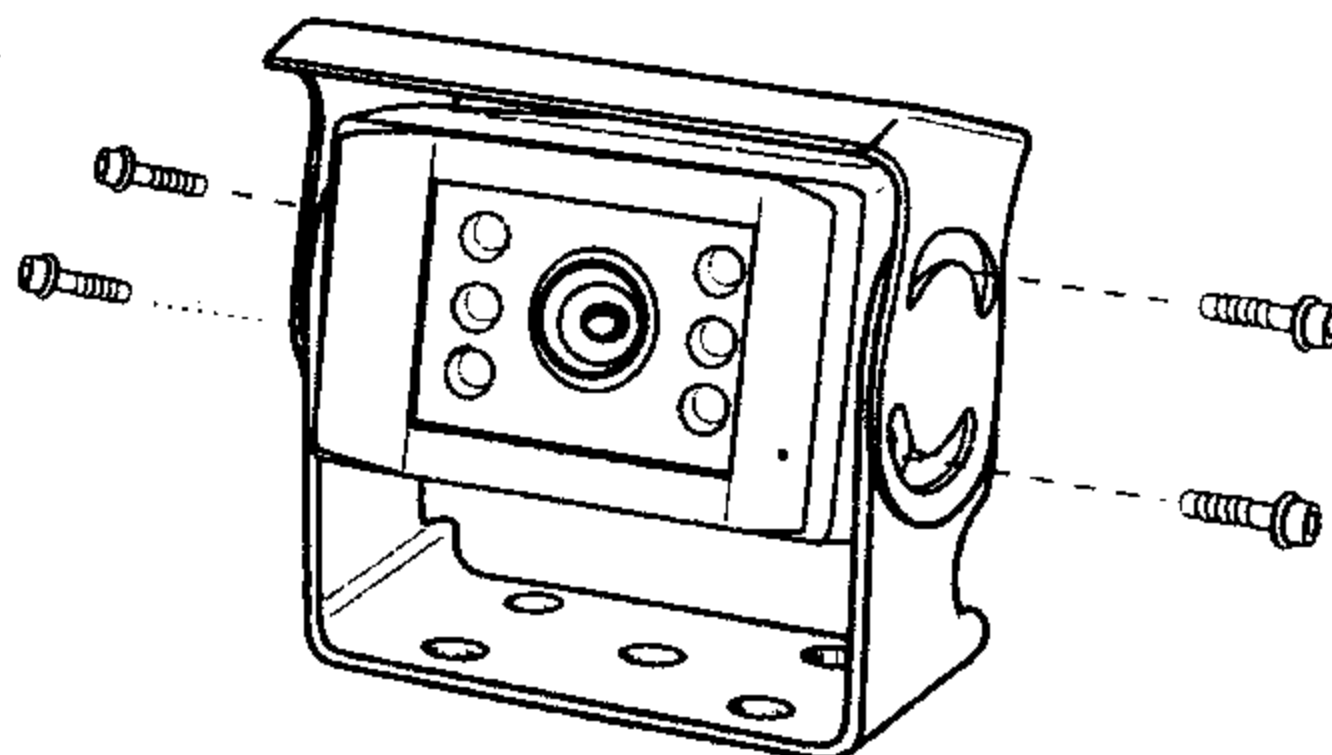

- B. Run the cable from the monitor to the camera

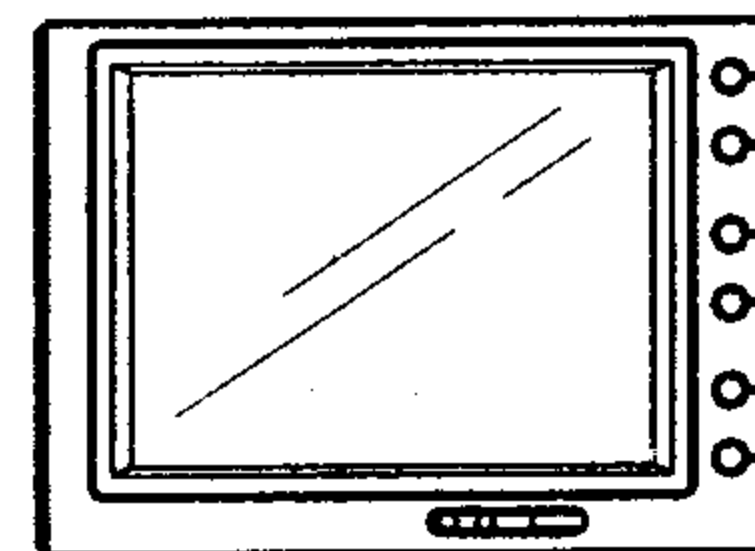

SPECIFICATIONS

Image	Interline transfer type CCD
Picture elements	NTSC : 270,000 pixels PAL : 320,000 pixels
Image size	1/3 Inch
Lens	Focal length 2.9mm, Maximum aperture F=2.0
Synchronization	Internal
Horizontal resolution	330TV lines
Required illumination	0.5 Lux Minimum
Signal to noise ratio	Minimum 47dB (at AGC off)
Power supply	12V DC
Power consumption	2.4W
Operating temp.	-30°C to +50°C (-22°F to +122°F)
Weight	0.4Kg
Dimensions	69(W) X 42(H) X 60(D) mm 2.7(W) X 1.7(H) X 2.4(D) Inch

* Design And Specifications Are Subject To Change Without Notice.